


**DATA SHEET**  
Lembar data produk



**6SPV46-3 T**  
Submersible Pump

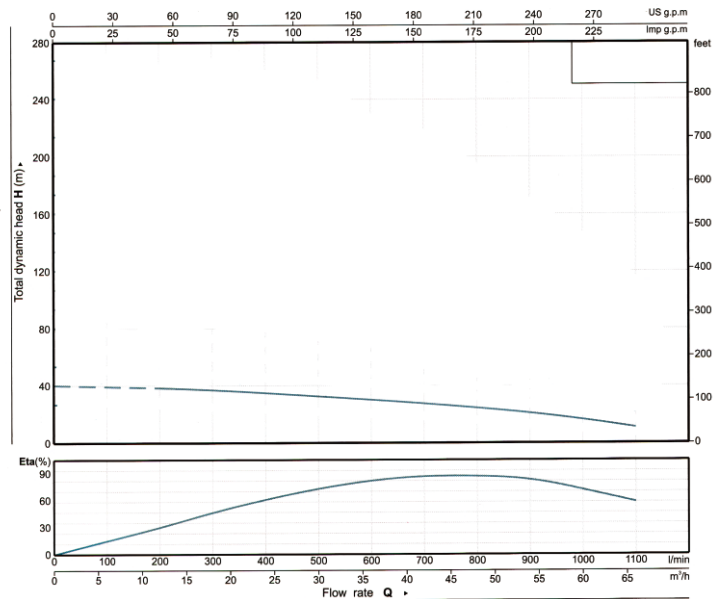

**Spesification:**

<b>Device application / Aplikasi</b>	<ul style="list-style-type: none"> <li>- Water Supply from well or reservoirs / Suplai air dari sumur atau tandon air.</li> <li>- Domestic use, for civil and industrial application / Penggunaan domestik, untuk rumah tangga dan industri.</li> </ul>
<b>Power / Listrik</b>	5.5 kW / 7.5 HP (3 Phase : 380 - 415V / 50 Hz)
<b>Outlet</b>	3"
<b>Max. Head / Head Maks.</b>	35 m
<b>Max. Flow</b>	54 m <sup>3</sup> /h
<b>Max. Capacity / Kapasitas Maks.</b>	900 l/min (on H : 21 m)
<b>Max. Fluid temperature / Temperatur Cairan Maks.</b>	Up to +50°
<b>Max. Sand Content / Kandungan Pasir Maks.</b>	0.25 %
<b>Min. Well Diameter / Diameter Sumur Min.</b>	6"
<b>Construction Material / Material Komponen</b>	<ul style="list-style-type: none"> <li>- Delivery Casing : AISI 304 SS</li> <li>- Suction Latern : AISI 304 SS</li> <li>- Diffuser : AISI 304 SS</li> <li>- Impeller : AISI 304 SS</li> <li>- Shaft : AISI 304 SS</li> <li>- Shaft Coupling : AISI 304 SS</li> <li>- Wear ring : Rubber</li> <li>- Motor external casing : AISI 304 SS</li> <li>- Top Chock : AISI 420 SS</li> <li>- Bottom Support : AISI 304 SS</li> <li>- Mechanical Seal : Special for deep well (Graphite-Ceramic)</li> <li>- Shaft : AISI 304 SS</li> <li>- Seal Lubricant Oil : Oil for food machinery &amp; pharmaceuetic use.</li> </ul>