


DATA SHEET
Lembar data produk



CUC 4-60

HORIZONTAL MULTISTAGE
MINI-BOOSTER

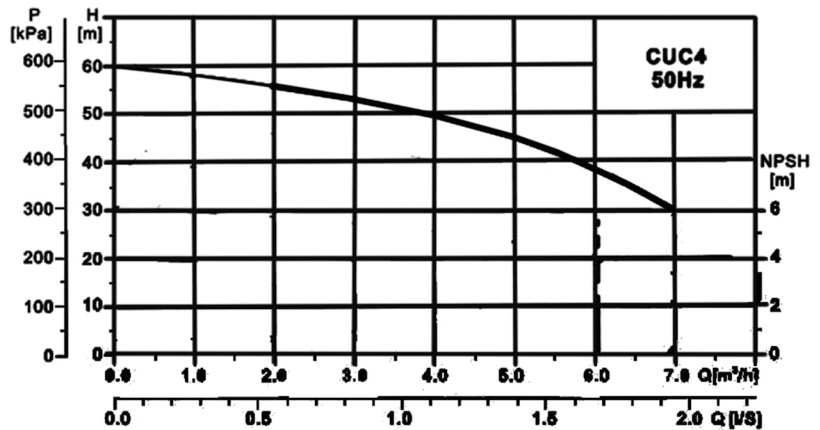

Spesification:

Device application / Aplikasi	Water distribution / Distribusi air Cooling system / sistem pendinginan
Power / Listrik	1100 Watt / 1.5 HP
Inlet / Outlet	1 1/4" x 1" ®
Max. Head / Head Maks.	45 m
Max. Flow	96 l/min
Max. Capacity / Kapasitas Maks.	96 l/min (on H : 30 m)
Fluid rate temperature / Temperatur Cairan	Up to 15° - 70° C
Max. ambient temperature / Temperatur Maks.	Up to +70° C
Protection / Proteksi.	Ip55
Construction Material / Bahan Dasar Pompa	- Pump Body : Stainless steel impeller housing
Pump Feature / Fitur Pompa	- Thermal protector : single phase - Insulation : F

Pump Structure

N.O.	Name
1	Dust cap
2	Plug
3	O-Ring
4	Inside hexagonal bolt
5	Inlet section assembly
6	O-Ring
7	Primary guide vanes components
8	Seal gasket
9	Locked Nut
10	Spring washer
11	Impeller press tube
12	Impeller

N.O.	Name
13	Long sleeve
14	Middle section
15	Last Diffuser
16	Seal gasket
17	Long sleeve
18	Shaft shield ring
19	Mechanical Seal
20	Outlet section assembly
21	O-Ring

N.O.	Name
22	Pump cover assembling
23	Motor
24	Base
25	Spring washer
26	Inside hexagonal bolt

